



HSV Satin Trevi




22 – Rosu

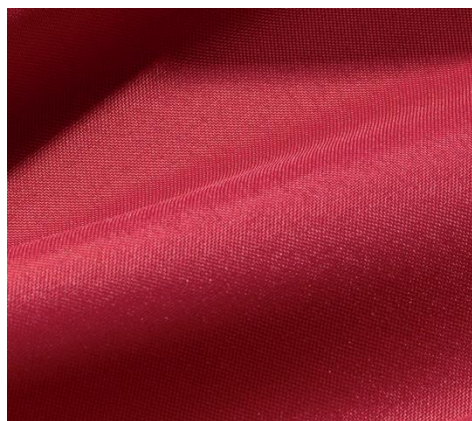


Cod	Format	Latime	Lungime	Compozitie	Greutate
HSV300P	Indoit si rulat	300 cm	±40 m	100 % poliester	115 g/m ²

Reactie la foc 	IFR - IGNIFUGAT PERMANENT Considerat a fi permanent ignifugat chiar si daca se uda sau spala cu apa. Materialul rezista la spalarea cu apa, dar este recomandata spalarea chimica profesionala.
---	---

Certificat de ignifugare 	EN 13501-1 clasa B s1 do UNI 9177 clasa 1 IMO Res. A471 (XIII)
---	--

Date fizico-mecanice	EN ISO 105-B02 Rezistenta culorii la expunere lumina artificiala : nivel 5 EN ISO 105-Co6 Rezistenta culorii la spalare (40° C) : nivel 5 EN ISO 12945-2 Rezistenta la scamosare: nivel 5 (foarte bun) EN ISO 12947-2 Rezistenta la frecare: 60,000 cicluri EN ISO 13934-1 Rezistenta la tensionare: urzeala 630 N, batatura 950 N
----------------------	--

Disponibilitate	la metru la rola confectionate la cerere
-----------------	--

Mod de curatare	
-----------------	---

Nota	Culoarele marcate cu * sunt disponibile la comanda, comanda minima 1 rola
------	---