


## CAB Sound absorber (material pentru antifonare)



99 – Negru

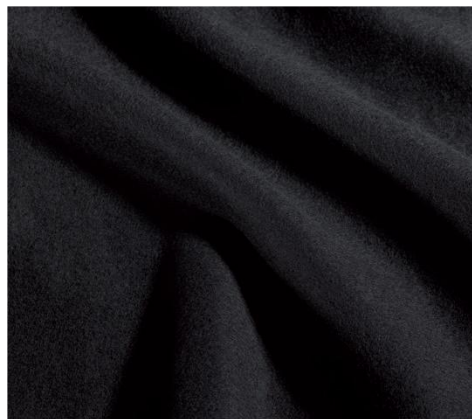

00 – natural

| Cod<br> | Format<br> | Latime<br> | Lungime<br> | Compozitie<br> | Greutate<br>         |
|---------|------------|------------|-------------|----------------|----------------------|
| CAB     | pliat      | 300 cm     | ±30 m       | 100 % bumbac   | 500 g/m <sup>2</sup> |

|                    |                                                                                                                                                                                                                 |
|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Reactie la foc<br> | <b>FR- IGNIFUGAT</b><br>Tratamentul ignifug este solubil in apa. Materialul NU se spala cu apa si trebuie folosit si pastrat in spatii curate, uscate, aerisite, ferite de caldura, soare si vreme nefavorabila |
|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

|                              |                                                                                          |
|------------------------------|------------------------------------------------------------------------------------------|
| Certificat de ignifugare<br> | EN 13501-1 clasa B s1 do<br>EN 13773 clasa 1<br>DIN 4102 clasa B1<br>NFP 92-503 class M1 |
|------------------------------|------------------------------------------------------------------------------------------|


|          |                                  |
|----------|----------------------------------|
| Tesatura | Tesatura periata pe ambele parti |
|----------|----------------------------------|

|                             |           |
|-----------------------------|-----------|
| Grad de opacitate           | ● ● ● ● ● |
| Grad de absorbtie a luminii | ● ● ● ● ● |
| Pentru pictura              | ● ● ● ○ ○ |


|                                                                                                                                                 |                                                                                                                                                                                                                                                                |
|-------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Absorbția sunetului <ul style="list-style-type: none"> <li>Montaj<br/>Tip G-150 (150 mm fata de peretele reflexiv)<br/>100% fullness</li> </ul> | ● ● ● ● ●<br><b>Conform EN ISO 11654:</b><br>Coeficient ponderat de absorbție a sunetului: $\alpha W = 0.75$ (H)<br>clasa de absorbție: C<br><b>Conform ASTM C423</b><br>Coeficient de reducere a zgomotului: NRC = 0.75<br>Absorbție fonică medie: SAA = 0.72 |
| Bariera acustica                                                                                                                                | ● ● ○ ○ ○<br>Conform ISO 16283 si ASTM E413                                                                                                                                                                                                                    |

# CAB SOUND ABSORBER

## TEST ACUSTICO / ACOUSTIC REPORT

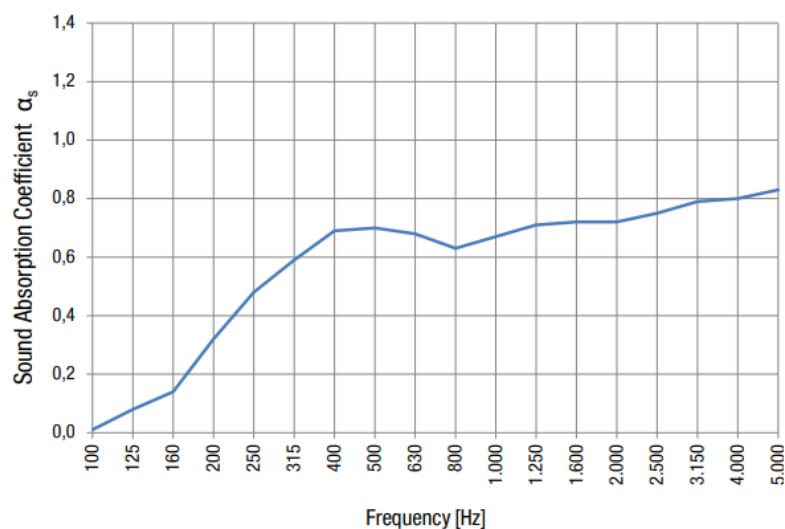

| Frequenza [Hz]<br>Frequency [Hz] | $\alpha_s$ | $\alpha_p$ |
|----------------------------------|------------|------------|
| 100                              | 0,01       | 0,10       |
| 125                              | 0,08       |            |
| 160                              | 0,14       |            |
| 200                              | 0,32       | 0,45       |
| 250                              | 0,48       |            |
| 315                              | 0,59       |            |
| 400                              | 0,69       | 0,70       |
| 500                              | 0,70       |            |
| 630                              | 0,68       |            |
| 800                              | 0,63       | 0,65       |
| 1.000                            | 0,67       |            |
| 1.250                            | 0,71       |            |
| 1.600                            | 0,72       | 0,75       |
| 2.000                            | 0,72       |            |
| 2.500                            | 0,75       |            |
| 3.150                            | 0,79       | 0,80       |
| 4.000                            | 0,80       |            |
| 5.000                            | 0,83       |            |

|                      |                                                                                     |
|----------------------|-------------------------------------------------------------------------------------|
| Disponibilitate      | la metru<br>la rola<br>confectionate la cerere                                      |
| Culori personalizate | Disponibile la cerere<br>Cantitate minima $\pm 500$ ml                              |
| Mod de curatare      |  |