


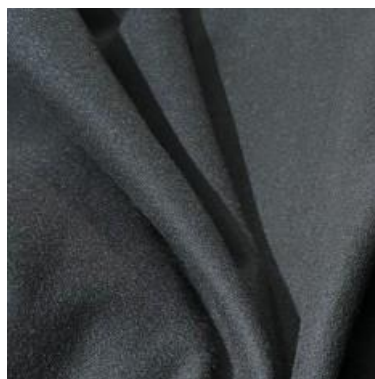

99 – Negru

Cod 	Format 	Latime 	Lungime 	Compozitie 	Greutate
COE	pliat	300 cm	±60 m	64 % bumbac reciclat, 36 % poliester reciclat	320 g/m ²

Reactie la foc 	FR- IGNIFUGAT Tratatamentul ignifug este solubil in apa. Materialul NU se spala cu apa si trebuie folosit si pastrat in spatii curate, uscate, aerisite, ferite de caldura, soare si vreme nefavorabila
--------------------	--

Certificat de ignifugare 	EN 13501-1 class B s1 do DIN 4102 class B1 NFP 92-503 class M1 Oeko-Tex® Standard 100
------------------------------	--

Culori personalizate	Nu sunt disponibile
----------------------	---------------------

Grad de opacitate	● ● ● ● ●
Grad de absorbtie a luminii	● ● ● ● ●
Pentru pictura	● ● ● ● ●
Pentru print	○ ○ ○ ○ ○

Disponibilitate	la metru la rola pe palet ±500 m confectionate la cerere
-----------------	---