




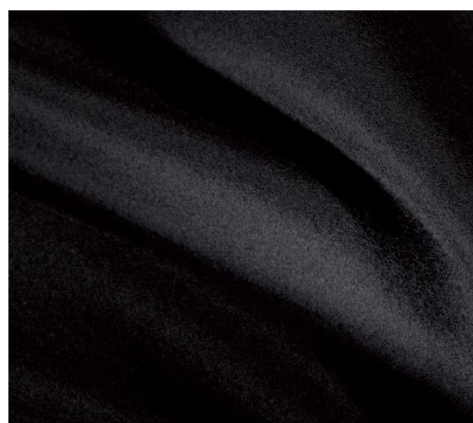

99 – negru



00-natural




01- alb




13-gri



99-negru



18-rosu




15-bordeaux




21-purpuriu



14-albastru



20-albastru
inchis



17-albastru
chroma key



19-verde
chroma key

Cod 	Culoare 	Latime 	Lungime 	Compozitie 	Greutate
COS200S	negru	200 cm	±60 m	100 % bumbac	325 g/m ²
COS300S	toate culorile	300 cm	±60 m	100 % bumbac	325 g/m ² negru 300 g/m ² culori

Reactie la foc 	FR- IGNIFUGAT Tratatamentul ignifug este solubil in apa. Materialul NU se spala cu apa si trebuie folosit si pastrat in spatii curate, uscate, aerisite, ferite de caldura, soare si vreme nefavorabila
--------------------	--

Certificat de ignifugare 	EN 13501-1 clasa B s1 do EN 13773 clasa 1 DIN 4102 clasa B1 NFP 92-503 class M1
------------------------------	--

Culori personalizate	Disponibile la cerere Cantitate minima ± 500 ml
----------------------	--

Caracteristici	Tesatura periata pe ambele parti
----------------	----------------------------------

Grad de opacitate	● ● ● ● ●
Grad de absorbtie a luminii	● ● ● ● ●
Pentru pictura	● ● ● ● ●
Pentru print digital	○ ○ ○ ○ ○
Absorbtia sunetului • Montaj Tip G-200 (200 mm fata de	● ● ● ● ● Conform ISO 11654 Coeficient masurat de absorbtie a sunetului: aw = 0.70 (MH)



peretele reflexiv) fara falduri	Clasa de absorbtie a sunetului: C Conform ASTM C423 Coeficient de reducere a zgomotului: NRC = 0.46
Bariera fonica	● ○ ○ ○ ○ Conform ISO 16283 Conform ASTM E413
Disponibilitate	la metru la rola confectionate la cerere
Format 	Pliat
Mod de curatare	    