


COT Tesatura opaca Teatro

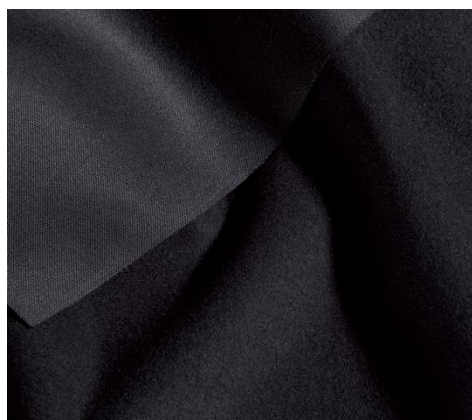

99 – Negru

Cod 	Format 	Latime 	Lungime 	Compozitie 	Greutate
COT	pliat	300 cm	± 60 m	100 % poliester	350 g/m ²

Reactie la foc 	IFR - IGNIFUGAT PERMANENT Considerat a fi permanent ignifugat chiar si daca se uda sau spala cu apa. Materialul rezista la spalarea cu apa, dar este recomandata spalarea chimica profesionala.
---------------------------	---

Certificat de ignifugare 	DIN 4102 clasa B1 UNI 9177 clasa 1 NFP 92-503 class M1
-------------------------------------	--

Culori personalizate	Disponibile la cerere Cantitate minima ± 500 ml
-----------------------------	--

Caracteristici	Tesatura periată pe ambele parti
-----------------------	----------------------------------

Grad de opacitate	● ● ● ● ○
Grad de absorbtie a luminii	● ● ● ● ○
Pentru pictura	● ● ○ ○ ○
Pentru print digital	○ ○ ○ ○ ○
Absorbtia sunetului - Montaj - Tip G-1000 (1000 mm fata de peretele reflexiv) - fara falduri	● ● ● ● ○ Conform ISO 11654 Coeficient masurat de absorbtie a sunetului: $\alpha_w = 0.50$ Clasa de absorbtie a sunetului: D

Bariera fonica	● ○ ○ ○ ○
-----------------------	-----------

Disponibilitate	la metru la rola confectionate la cerere
-----------------	--

Mod de curatare	    
-----------------	--