



SHS Shelter plus

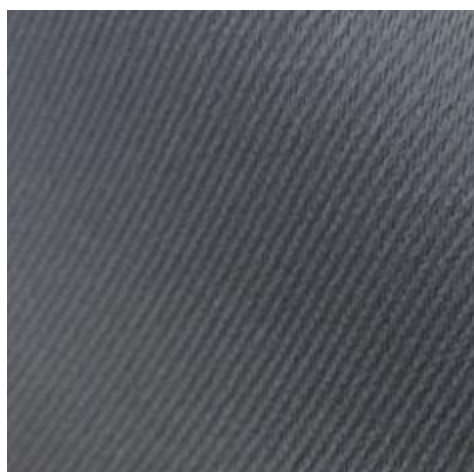

96-gri închis

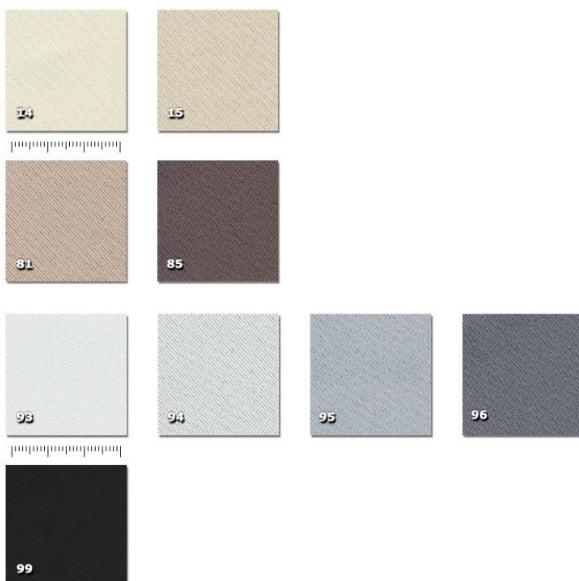

14. bej deschis
15. bej
81. aluna
85. maro
93. gri foarte deschis
94. gri deschis
95. gri
96. gri închis
99. negru

Cod	Format	Latime	Lungime	Compozitie	Greutate
SHS	Indoit si rulat	150 cm	±50 m	100 % poliester	430 g/m ²

Reactie la foc 	IFR - IGNIFUGAT PERMANENT Considerat a fi permanent ignifugat chiar si daca se uda sau spala cu apa. Materialul rezista la spalarea cu apa, dar este recomandata spalarea chimica profesionala.
---------------------------	---

Certificat de ignifugare 	EN 13773 class 1 UNI 9177 class 1 NF M1 DIN 4102 class B1 BS 5867 Type B NFPA 701 pass certificat IMO
-------------------------------------	---

Grad de opacitate	● ● ● ● ●
Grad de absorbtie a luminii	● ● ● ● ●
Absorbtia sunetului Montaj Tip G-100 (100 mm fata de peretele reflexiv) 100% fullness	Conform ISO 11654 Coeficient masurat de absorbtie a sunetului: $\alpha_w = 0.90$ (MH) Clasa de absorbtie a sunetului: A Conform ASTM C423 Coeficient de reducere a zgomotului: $NRC = 0.80$ Absorbtie fonica medie ASS = 0.83

Bariera fonica	 Conform ISO 16283 Conform ASTM E413
Culori personalizate	disponibile la cerere cantitate minima ± 400 ml
Disponibilitate	la rola confectionate la cerere