



HSX Sintex

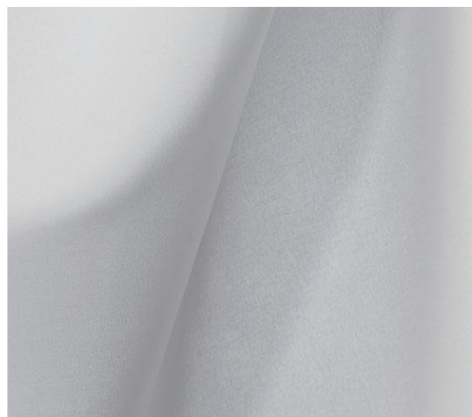


01 – Alb



02 – Fildes



45-rosu



95-gri

Cod 	Format 	Latime 	Lungime 	Compozitie 	Greutate
HSX	Indoit si rulat	330 cm	±50 m	100 % poliester	55 g/m ²

Reactie la foc 	IFR - IGNIFUGAT PERMANENT Considerat a fi permanent ignifugat chiar si daca se uda sau spala cu apa. Materialul rezista la spalarea cu apa, dar este recomandata spalarea chimica profesionala.
--------------------	--

Certificat de ignifugare 	UNI 9177 clasa 1
------------------------------	------------------

Culori personalizate	nu sunt disponibile
----------------------	---------------------

Lejeritate	● ● ● ● ○ fundaluri fluctuante
Grad de absorbtie a luminii	● ● ● ● ○
Wall effect cu iluminare frontala	● ● ● ● ●
Iluminare frontala	● ● ● ● ●
Iluminare retro	● ● ● ● ●
Pentru pictura	● ○ ○ ○ ○
Pentru print digital	● ○ ○ ○ ○

Disponibilitate	la metru la rola confectionate la cerere
-----------------	--

Mod de curatare	
-----------------	--

