








## LWE Windel Chroma

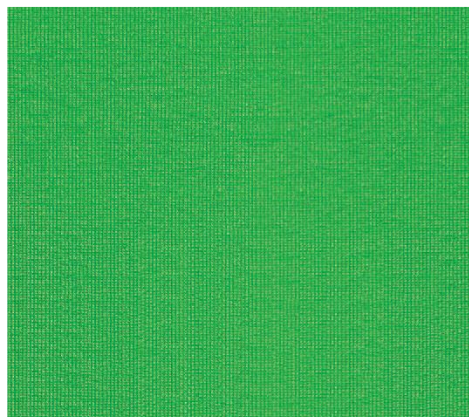



04 - Albastru  
chroma key

05 - verde chroma key\*

\*cantitate minima de comanda: 100ml


Cod 	Format 	Latime 	Lungime 	Compozitie 	Greutate 
LWE	rola	200 cm	±50 m	85 % polyester 15 % elasthan	260 g/m <sup>2</sup>

Reactie la foc 	IFR - IGNIFUGAT PERMANENT Considerat a fi permanent ignifugat chiar si daca se uda sau spala cu apa. Materialul rezista la spalarea cu apa, dar este recomandata spalarea chimica profesionala.
---	--

Certificat de ignifugare 	EN 13501-1 clasa B s1 do DIN 4102 clasa B1 NFP 92-503 class M1
---	--

Disponibilitate	la metru la rola confectionate la cerere
-----------------	--

Elongatie	± 40 % pe lungime ± 20 % pe latime
-----------	---------------------------------------

Mod de curatare	
-----------------	---