


PNE - Nerissimo

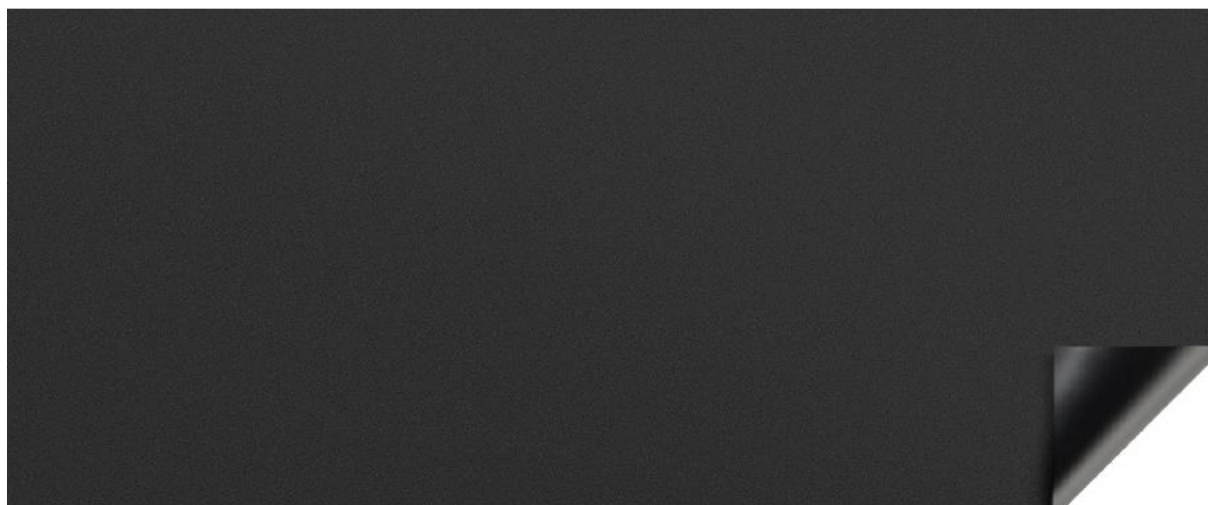


Cod 	Latime 	Lungime 	Grosime 	Compozitie 	Greutate 
PNE	180 cm	100 m	0.40 mm	100 % PVC	550 g/m ²

Reactie la foc 	IFR - IGNIFUGAT PERMANENT rezistent la foc si nu intretine arderea
---	---

Certificat de ignifugare 	EN 13501-1 clasa B s1 d0 UNI 9177 clasa 1 DIN 4102 clasa B1 NFPA 701 pass
---	--

Caracteristici	pentru proiectie fata opacitate: 100% opac peak gain: 0.27β
----------------	---

Culoare	negru
---------	-------

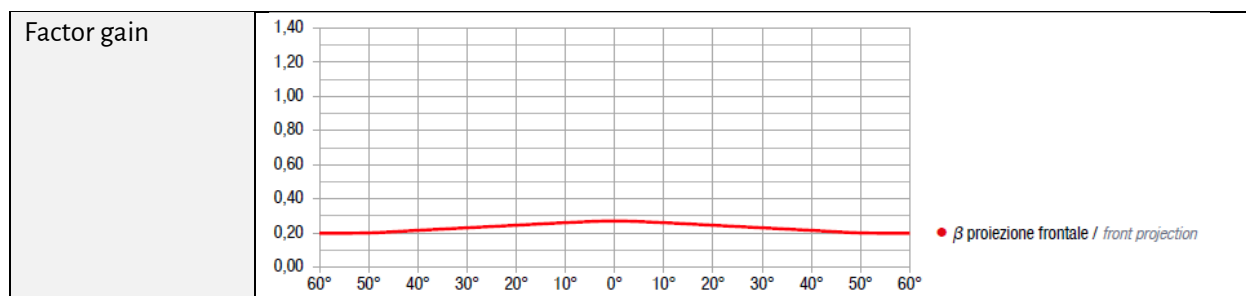

Proiectie fata	● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ○ ○ ○ ○ ○ ● ● ● ● ● ● ● ● ● ● ○ ○ ○ ○ ○ ● ● ● ● ● luminozitate contrast fidelitatea culorilor con de viziune anti parasitic light (interference environmental light)
----------------	--

Pentru print	● ● ○ ○ ○
--------------	-----------

Sudare	● ● ● ● ● - fara suprapozare
--------	------------------------------

Disponibilitate	la metru (pe rola sau impachetat, max.25 m/rola) la rola intreaga confectionat la cerere
-----------------	---