

RPO - Polar




Cod 	Latime 	Lungime 	Grosime 	Compozitie 	Greutate 
RPO	305 cm	90 m	0.30 mm	100 % PVC	375 g/m ²

Reactie la foc 	IFR - IGNIFUGAT PERMANENT rezistent la foc si nu intretine arderea
---	---

Certificat de ignifugare 	EN 13501-1 clasa B s1 d0 UNI 9177 clasa 1 DIN 4102 clasa B1 NFPA 701 pass
--	--

Caracteristici	pentru proiectie retro si fata opacitate: translucid peak gain: 2.00β proiectie retro peak gain: 0.37β proiectie fata
----------------	--

Culoare	gri
---------	-----

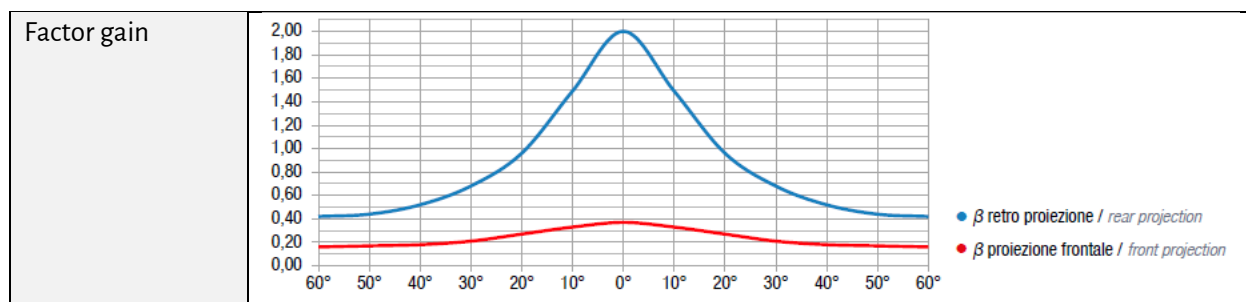

Proiectie retro	●●●●● ●●●●○ ●●●●● ●●●●○ ●●●●○ ●●●●○ luminozitate contrast fidelitatea culorilor con de viziune anti hot spot (light diffusion) anti parasitic light (interference environmental light)
-----------------	---

Proiectie fata	●●●●○
----------------	-------

Pentru print	●●●●●
--------------	-------

Sudare	●●●●● - fara suprapozare
--------	--------------------------

Disponibilitate	la metru (pe rola sau impachetat, max.25 m/rola) la rola intreaga confectionat la cerere
-----------------	---