

RTE - Temporale




Cod 	Latime 	Lungime 	Grosime 	Compozitie 	Greutate 
RTE	140 cm	100 m	0.30 mm	100 % PVC	400 g/m ²

Reactie la foc 	IFR - IGNIFUGAT PERMANENT rezistent la foc si nu intretine arderea
---	---

Certificat de ignifugare 	EN 13501-1 clasa B s1 do UNI 9177 clasa 1
--	--

Caracteristici	pentru proiectie retro si fata opacitate: translucid peak gain: 0.31 proiectie retro peak gain: 0.47 proiectie fata
----------------	--

Culoare	gri
---------	-----

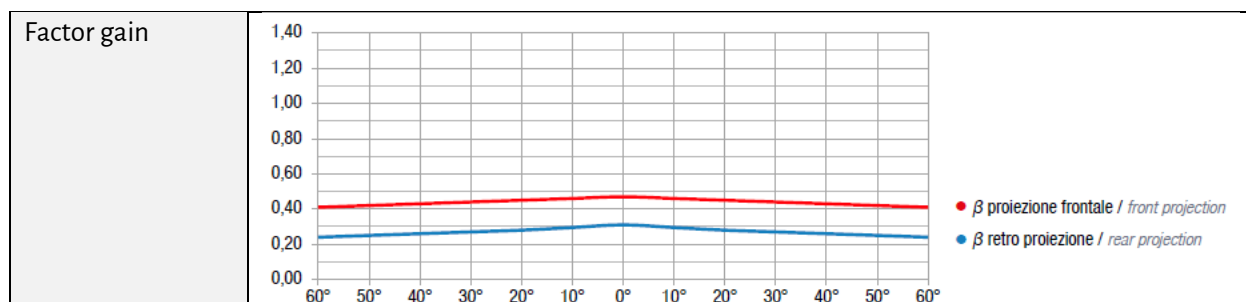

Proiectie retro	●●●●○ luminozitate ●●●●○ contrast ●●●●●●●●●● fidelitatea culorilor ●●●●●●●● con de viziune ●●●●●●●● anti hot spot (difuzia luminii) ●●●●○ anti parasitic light (interference environmental light)
-----------------	--

Proiectie fata	●●●●○
----------------	-------

Pentru print digital	●●●●●
----------------------	-------

Sudare	●●●●● - fara suprapozare
--------	--------------------------

Disponibilitate	la metru la rola intreaga confectionat la cerere
-----------------	--