


UNR Resinet

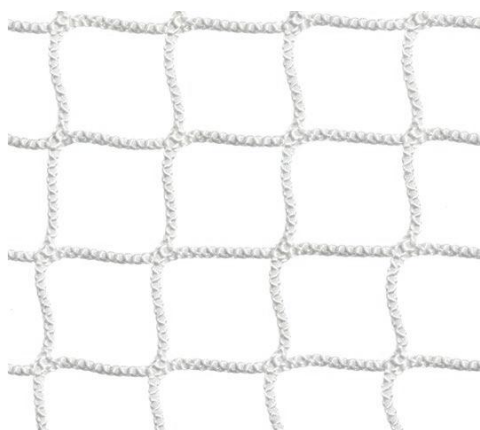

01 – Alb

20x20mm Ø 1.5mm

Cod 	Culoare 	Mesh 	Sarcina de rupere	Greutate 	Compozitie
UNR1000P-25C2	Alb, negru	25 x 25 mm - Ø 2,0 mm	42 kg	220 g/m ²	100 % nylon cde rezistenta mare
UNR1000P-25C25		25 x 25 mm - Ø 2,5 mm	60 kg	300 g/m ²	
UNR1000P-42C3		42 x 42 mm - Ø 3,0 mm	80 kg	215 g/m ²	
UNR1000P-50C5		50 x 50 mm - Ø 5,0 mm	120 kg	400 g/m ²	

Reactie la foc 	NFR-NU ESTE IGNIFUGAT *culori IFR - IGNIFUGAT PERMANENT *alb, negru Considerat a fi permanent ignifugat chiar si daca se uda sau spala cu apa. Materialul rezista la spalarea cu apa, dar este recomandata spalarea chimica profesionala
--------------------	--

Certificat de ignifugare 	UNI 9177 clasa 1
------------------------------	------------------

Caracteristici	rezistenta ridicata pentru uz exterior impermeabil
----------------	--

Culori personalizate	disponibile la cerere, culori de baza : rosu, albastru, verde
----------------------	---

Mod de impachetare	pliat
--------------------	-------

Finisare	disponibil cu sau fara intaritura perimetrala la cerere se poate prelucra cu intaritura perimetrala si cu gauri capsate
----------	--

Disponibilitate	confectionat la dimensiunile de mai sus
-----------------	---

